

SMART-L

Market leading efficacies

among mid power LED luminaires with lens design reach **154 lm/W**.

Simple phase switching

allows a simple grouping of luminaires in a non-DALI environment.

Low installation costs



are achieved through an integrated through-wiring and DALI system with no need for external cabling.

3h emergency

tops the list of benefits of this versatile, highly efficient luminaire.

Flexibility in lighting design

is achieved by different lighting distributions suitable for both industry and retail applications.

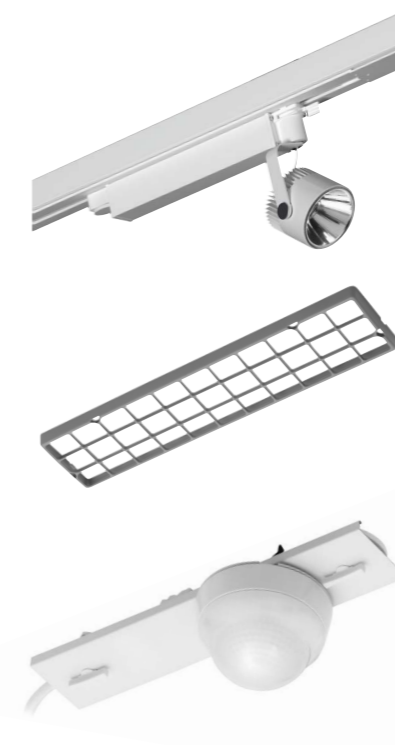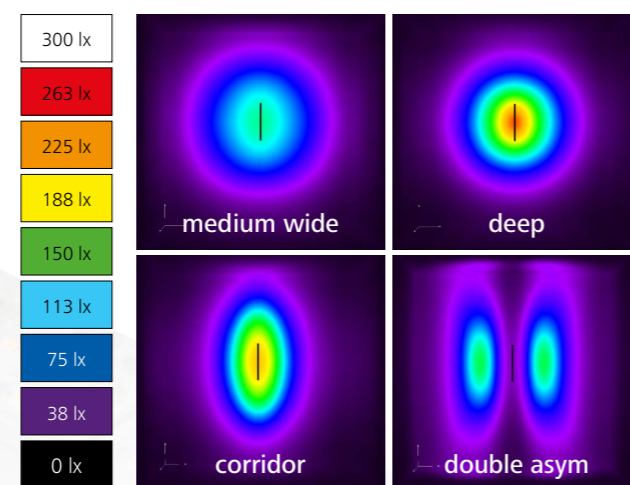

3-phase rail integration

allows the installation of trackspots within the Smart-L system.

Workspace compatibility

can be ensured by optional antiglare grid with **UGR <19**.

Optional sensor integration

can be used for movement detection and harvesting of available daylight.

