



## Dimensions



## LIDC



# K056AC0006


**SANA PV-1 MICROPRISMA LED 4200lm/840 1x43W, FIX, -**

## Description

<b>MOUNTING</b>	Ceiling recessed PVx - T-ceiling
<b>LIGHT SOURCE</b>	LED
<b>OPTICAL SYSTEM</b>	Microprismatic diffuser (MCD)
<b>LIGHT DISTRIBUTION</b>	Direct
<b>WIRING</b>	Electronic control gear FIX (ECG)
<b>MATERIALS</b>	Diffuser: PC Housing: aluminium
<b>SURFACE FINISH</b>	Housing: white RAL 9016 (W16)
<b>ACCESSORIES</b>	Rope suspension Frame for plasterboard installation Frame for surfaced installation
<b>VOLTAGE</b>	220-240 V, 50-60 Hz
<b>POWER FACTOR</b>	> 0,95
<b>NET LUMEN OUTPUT (Ta=25°C)</b>	4200 lm
<b>LUMINOUS FLUX TOLERANCE</b>	+/- 10 %
<b>POWER CONSUMPTION</b>	43 W
<b>SYSTEM EFFICACY</b>	98 lm/W
<b>CORRELATED COLOUR TEMPERATURE</b>	4000 K
<b>COLOUR RENDERING INDEX</b>	80 Ra
<b>COLOUR TOLERANCE</b>	6 SDCM
<b>EEC</b>	A++ / A+ / A
<b>PROTECTION CLASS</b>	II
<b>THERMAL MANAGEMENT</b>	Passive
<b>SERVICE LIFETIME (Ta=25°C)</b>	50,000 hours / L70 / B50
<b>AMBIENT OPERATING TEMPERATURE</b>	From -20 °C to +35 °C
<b>IP PROTECTION DEGREE</b>	IP20, optical part IP40
<b>DIMENSIONS (L x W x H)</b>	PV1: 595 x 595 x 10 mm
<b>WEIGHT</b>	4,1 kg

- AREAS OF APPLICATION**
- EDUCATION
  - HOSPITALITY
  - HEALTH AND CARE
  - OFFICE




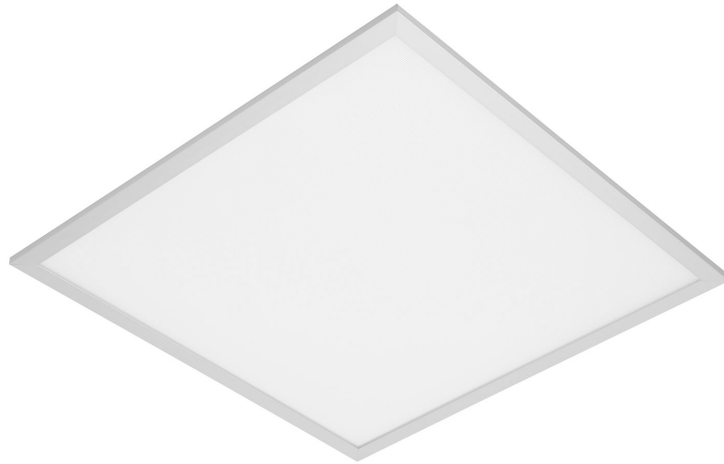

## Dimensions



## LIDC



# K056AC0014

**SANA PR-1 MICROPRISMA LED 4200lm/840 1x43W, FIX**

## Description

### MOUNTING

Ceiling recessed  
PVx - T-ceiling

### LIGHT SOURCE

LED

### OPTICAL SYSTEM

Microprismatic diffuser (MCD)

### LIGHT DISTRIBUTION

Direct

### WIRING

Electronic control gear FIX (ECG)

### MATERIALS

Diffuser: PC

Housing: aluminium

Housing: white RAL 9016 (W16)

Rope suspension

Frame for plasterboard installation

Frame for surfaced installation

### SURFACE FINISH

### ACCESSORIES

### VOLTAGE

220-240 V, 50-60 Hz

### POWER FACTOR

> 0,95

### NET LUMEN OUTPUT (Ta=25°C)

4200 lm

### LUMINOUS FLUX TOLERANCE

+/- 10 %

### POWER CONSUMPTION

43 W

### SYSTEM EFFICACY

98 lm/W

### CORRELATED COLOUR TEMPERATURE

4000 K

### COLOUR RENDERING INDEX

> 80 Ra

### COLOUR TOLERANCE

6 SDCM

### EEC

A++ / A+ / A

### PROTECTION CLASS

II

### THERMAL MANAGEMENT

Passive

### SERVICE LIFETIME (Ta=25°C)

50,000 hours / L70 / B50

### AMBIENT OPERATING TEMPERATURE

From -20 °C to +35 °C

### IP PROTECTION DEGREE

IP20, optical part IP40

### DIMENSIONS (L x W x H)

PV1: 620 x 620 x 10 mm

### WEIGHT

3,7 kg

## AREAS OF APPLICATION


EDUCATION

HOSPITALITY

HEALTH AND CARE

OFFICE




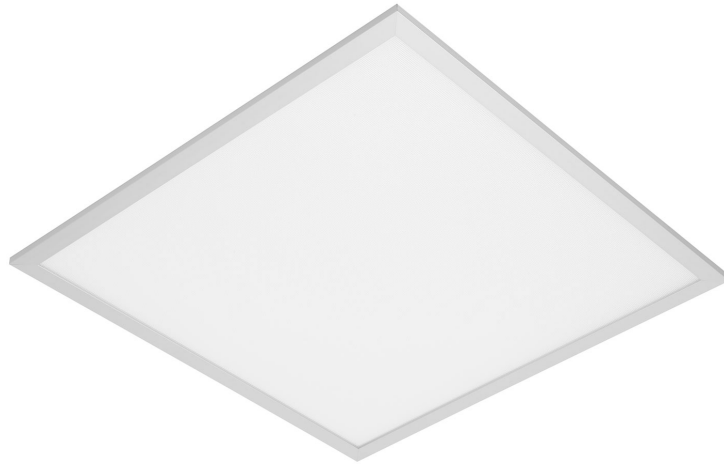

## Dimensions



## LIDC



# K056AC0078

**SANA PR-1 MICROPRISMA LED 3700lm/840 1x35W, DALI**

## Description

### MOUNTING

Ceiling recessed  
PVx - T-ceiling

### LIGHT SOURCE OPTICAL SYSTEM

LED  
Microprismatic diffuser (MCD)  
Direct

### LIGHT DISTRIBUTION

### WIRING

Electronic control gear DALI (EDA)

### MATERIALS

Diffuser: PC  
Housing: aluminium

### SURFACE FINISH

Housing: white RAL 9016 (W16)

### ACCESSORIES

Rope suspension  
Frame for plasterboard installation  
Frame for surfaced installation

### VOLTAGE

220-240 V, 50-60 Hz

### POWER FACTOR

> 0,95

### NET LUMEN OUTPUT (Ta=25°C)

3700 lm

### LUMINOUS FLUX TOLERANCE

+/- 10 %

### POWER CONSUMPTION

35 W

### SYSTEM EFFICACY

106 lm/W

### CORRELATED COLOUR TEMPERATURE

4000 K

### COLOUR RENDERING INDEX

> 80 Ra

### COLOUR TOLERANCE

3 SDCM

### EEC

A++ / A+ / A

### PROTECTION CLASS

II

### THERMAL MANAGEMENT

Passive

### SERVICE LIFETIME (Ta=25°C)

50,000 hours / L70 / B50

### AMBIENT OPERATING TEMPERATURE

From -20 °C to +35 °C

### IP PROTECTION DEGREE

IP20, optical part IP40

### DIMENSIONS (L x W x H)

PV1: 620 x 620 x 10 mm

### WEIGHT

3,7 kg

## AREAS OF APPLICATION

EDUCATION

HOSPITALITY

HEALTH AND CARE

OFFICE

