




PRODUCT DETAILS



Dimensions

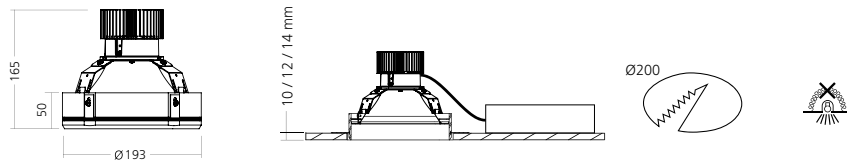

K002AX0109




oCAM TM DWN PRE 255093 125 ECG W03

CAIM TRIMLESS LED 2550lm/930 1x25W, FIX


Description

MOUNTING	Ceiling recessed
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	Direct
WIRING	Electronic control gear FIX (ECG)
MATERIALS	Housing: sheet steel Reflector: polished anodised aluminium Trim: sheet steel Plasterboard trim: aluminium profile Holders: zinc coated sheet steel
SURFACE FINISH	Trim: white RAL 9003 (W03)
VOLTAGE	220-240 V, 50-60 Hz
POWER FACTOR	> 0,95
NET LUMEN OUTPUT (Ta=25°C)	2550 lm
LUMINOUS FLUX TOLERANCE	+/- 10 %
POWER CONSUMPTION	25 W
SYSTEM EFFICACY	102 lm/W
CORRELATED COLOUR TEMPERATURE	3000 K
COLOUR RENDERING INDEX	90 Ra
EEC	A++ / A+ / A
PROTECTION CLASS	II
THERMAL MANAGEMENT	Passive
AMBIENT OPERATING TEMPERATURE	From -20 °C to +35 °C
IP PROTECTION DEGREE	IP20, optical part IP40
DIMENSIONS	Diameter - 193 mm, height - 165 mm
OPENING	Diameter - 200 mm
WEIGHT	1,5 kg

AREAS OF APPLICATION

-  EDUCATION
-  HOSPITALITY
-  HOUSE AND FLAT

LIDC



HEALTH AND CARE

RETAIL AND PRESENTATION

OFFICE



The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.