





Dimensions



Accessories

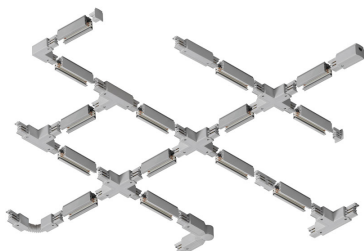

K023AT0024

oAIR II TRS 40° 405084 137 ECG W03


AIR II 40° LED 4050lm/840 1x37W, FIX

Description

MOUNTING	Suspended or ceiling surfaced lighting track system - suitable for ONETRACK (TRS)
LIGHT SOURCE	LED
BEAM ANGLE	40°
LIGHT DISTRIBUTION	Direct
WIRING	Electronic control gear FIX (ECG)
MATERIALS	Housing: die-cast aluminium + sheet steel Reflector: facet anodized aluminium
SURFACE FINISH	Housing: white RAL 9003 (W03)
ACCESSORIES	Various types of connections and suspension equipment (ONETRACK)
VOLTAGE	220-240 V, 50-60 Hz
POWER FACTOR	> 0,95
NET LUMEN OUTPUT (Ta=25°C)	4050 lm
LUMINOUS FLUX TOLERANCE	+/- 10 %
POWER CONSUMPTION	37 W
SYSTEM EFFICACY	109 lm/W
RISK OF PHOTOBIOLOGICAL DAMAGE	Exempt group = 0
CORRELATED COLOUR TEMPERATURE	4000 K
COLOUR RENDERING INDEX	80 Ra
COLOUR TOLERANCE	3 SDCM
EEC	A++ / A+ / A
PROTECTION CLASS	I
THERMAL MANAGEMENT	Passive
SERVICE LIFETIME (Ta=25°C)	50,000 hours / L80 / B10
AMBIENT OPERATING TEMPERATURE	From -20 °C to +35 °C
IP PROTECTION DEGREE	IP20
DIMENSIONS (L x W x H)	332 x 99 x 190 mm
ROTATING	Up to 350°
PIVOTING	Up to 350°
WEIGHT	1 kg

AREAS OF APPLICATION  ARCHITECTURE AND MEDIA

LIDC



RETAIL AND PRESENTATION



5 YEARS WARRANTY



EEC
A++/A+/A



HEAT
SINK



MAINTENANCE
FREE



UV/IR



ECO
FRIENDLY



ENERGY
SAVING

The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.