


AIRN C D-I SUSPENDED



AIRN C D-I

AIRN C D-I SUSPENDED (706 mm diameter) brings the direct-indirect lighting mix to this definitive luminaire range. With an optimal ratio of 60:40 (3200:2150 lm in CCT 4000 K, 3050:2000 lm in CCT 3000 K) direct to indirect light distribution, this new option allows for the creation of lighting designs that adorn ceilings with soft circles of light that both enhance the architectural features of the space and create a more uninhibited atmosphere. AIRN C D-I comes with a power consumption of only 105 W and versatile colour rendition of CRI 80+ Ra. The luminaire is also technically flexible thanks to the choice of a FIX or DALI dimmable driver, and with a weight of 8.2 kg, it is also easy to install.

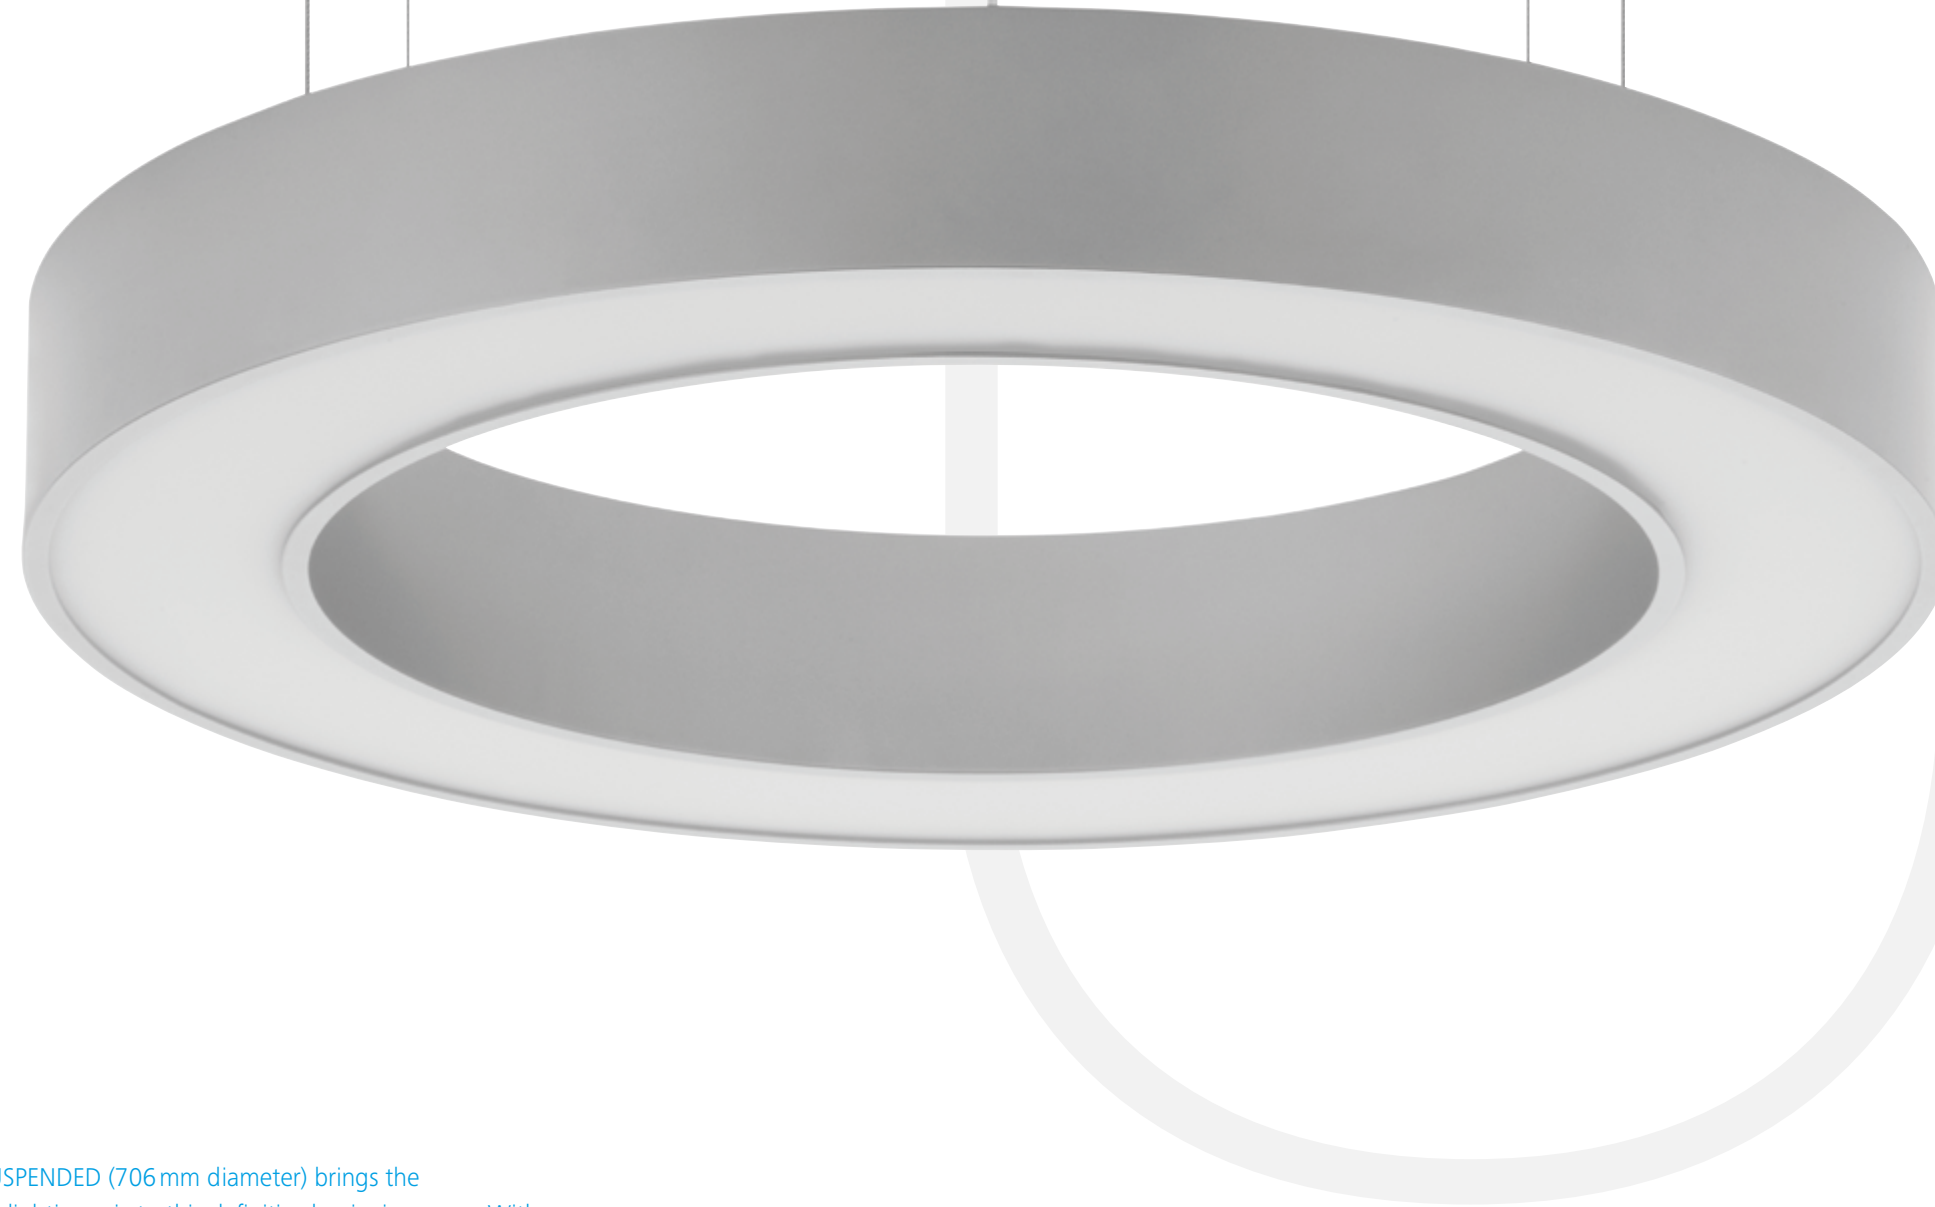