

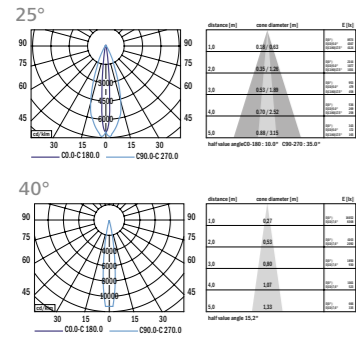

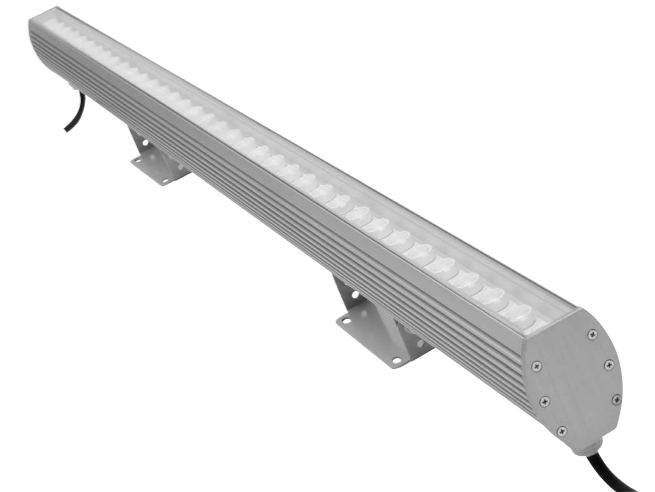


OUTDOOR FAMILY WHITE / TUNABLE WHITE

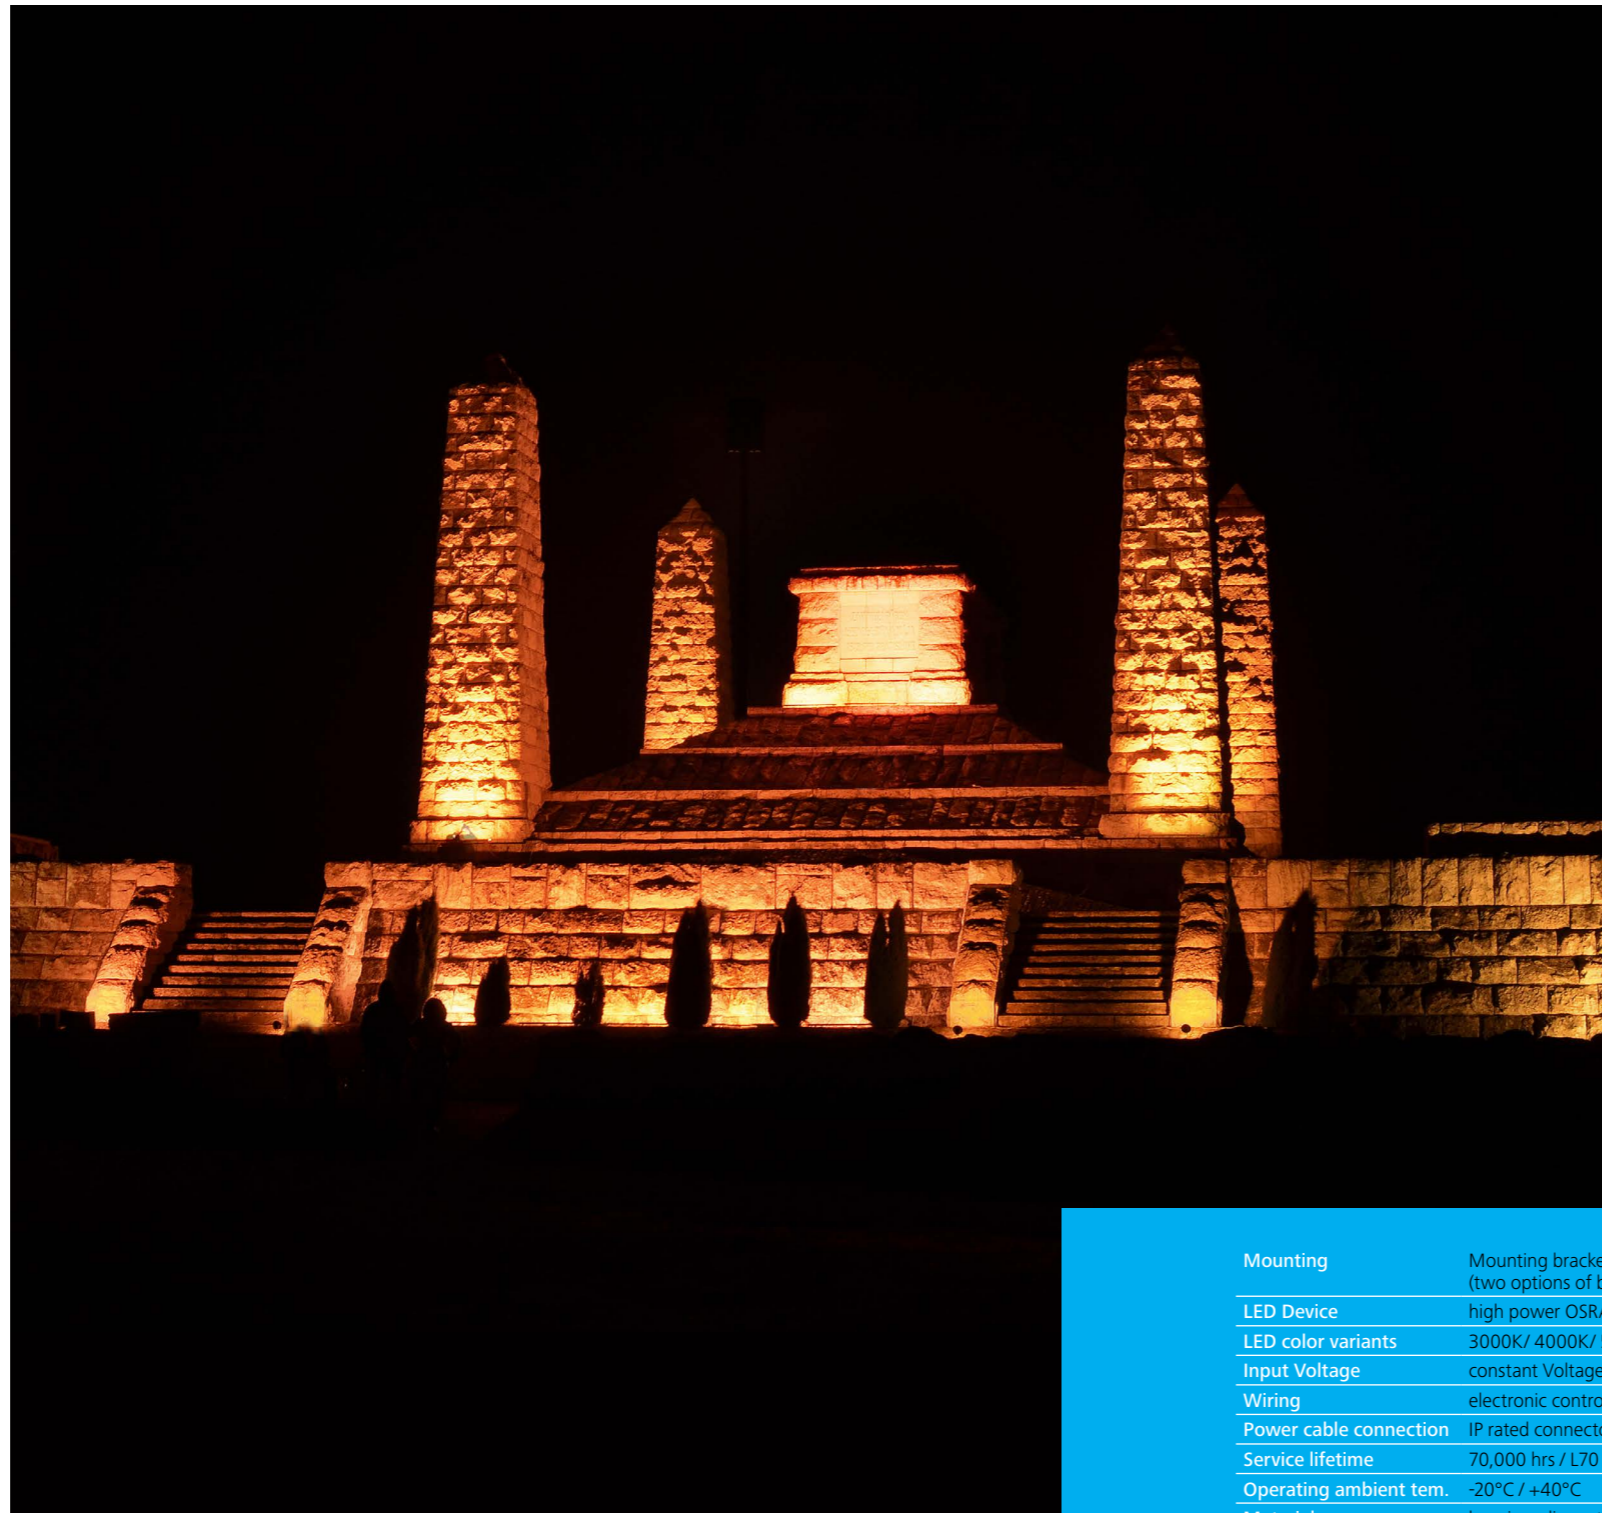

DIMENSIONS

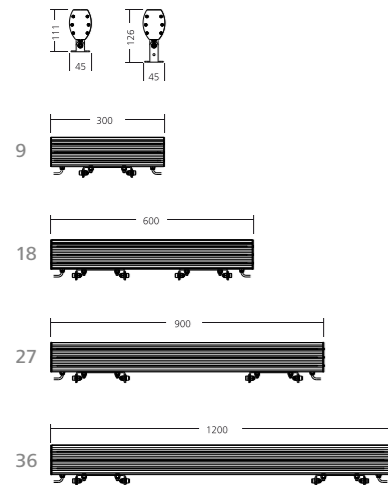

LED

up to
4536
lm

Mounting	Mounting bracket adjustable (two options of bracket lengths)
LED Device	high power OSRAM LEDs
LED color variants	3000K/ 4000K/ 5700K
Input Voltage	constant Voltage 48V DC
Wiring	electronic control gear intergated
Power cable connection	IP rated connectors
Service lifetime	70,000 hrs / L70 @25°C
Operating ambient tem.	-20°C / +40°C
Materials	housing: die cast aluminium cover: clear hardened glass
Dimensions	9 WHITE: 111 / 126 x 45 x 300 mm 18 WHITE: 111 / 126 x 45 x 600 mm 27 WHITE: 111 / 126 x 45 x 900 mm 36 WHITE: 111 / 126 x 45 x 1200 mm
Accessories (not included):	constant Voltage 48V power supply

AEDI LINE PARVUS
9/18/27/36 WHITE

AEDI LINE PARVUS with state-of-the-art WHITE LED technology and made using the highest quality materials and construction methods. Bringing the flexibility to outdoor application, this powerful lighting fixture is ideally suited to use in landscape and building illumination, and IP66 ensures safe operation in even the most demanding areas.

Type	net lumen output (at Ta = 25 °C) (lm)	power consumption W (mA)	LED Device (LEDs Pcs.)	beam angle	weight (kg)
AEDI LINE PARVUS 9 WHITE	1134	9 (350) / 16,5 (600)	9	Narrow / Medium / Wide / Oval	0.8
AEDI LINE PARVUS 18 WHITE	2268	18 (350) / 33 (600)	18	Narrow / Medium / Wide / Oval	1.98
AEDI LINE PARVUS 27 WHITE	3402	27 (350) / 48 (600)	27	Narrow / Medium / Wide / Oval	2.96
AEDI LINE PARVUS 36 WHITE	4536	36 (350) / 64,5 (600)	36	Narrow / Medium / Wide / Oval	3.95

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.

