




## PRODUCT DETAILS



## Dimensions



## Accessories



# SANA II

**SANA II PV1 LED 4350lm/840 1x35W, DALI, RAL 9016**

## DOWNLOADS

[Datasheet](#)

[Product sheet](#)

[Installation manual](#)

[IES file](#)

[LDT file](#)

[EEC](#)

## Description

<b>MOUNTING</b>	Ceiling recessed PVx - T-ceiling
<b>LIGHT SOURCE</b>	LED
<b>OPTICAL SYSTEM</b>	Microprismatic diffuser (MCD)
<b>BEAM ANGLE</b>	85°, 90°
<b>LIGHT DISTRIBUTION</b>	Direct
<b>WIRING</b>	Electronic control gear DALI (EDA)
<b>MATERIALS</b>	Housing: aluminium Diffuser: PS
<b>SURFACE FINISH</b>	Housing: white RAL 9016
<b>ACCESSORIES</b>	Rope suspension Frame for plasterboard installation Frame for surfaced installation
<b>VOLTAGE</b>	220-240 V, 50-60 Hz
<b>POWER FACTOR</b>	0,96
<b>NET LUMEN OUTPUT (Ta=25°C)</b>	4350 lm
<b>LUMINOUS FLUX TOLERANCE</b>	+/- 10 %
<b>POWER CONSUMPTION</b>	35 W
<b>SYSTEM EFFICACY</b>	124 lm/W
<b>CORRELATED COLOUR TEMPERATURE</b>	4000 K
<b>COLOUR RENDERING INDEX</b>	>80 Ra
<b>COLOUR TOLERANCE</b>	3 SDCM
<b>PROTECTION CLASS</b>	II
<b>SERVICE LIFETIME (Ta=25°C)</b>	50,000 hours / L70 / B50
<b>AMBIENT OPERATING TEMPERATURE</b>	From -20 °C to +35 °C
<b>IP PROTECTION DEGREE</b>	IP20, optical part IP40
<b>DIMENSIONS (L x W x H)</b>	PV1: 595 x 595 x 10 mm
<b>WEIGHT</b>	5,7 kg


## AREAS OF APPLICATION

EDUCATION


HOSPITALITY

HEALTH AND CARE

OFFICE

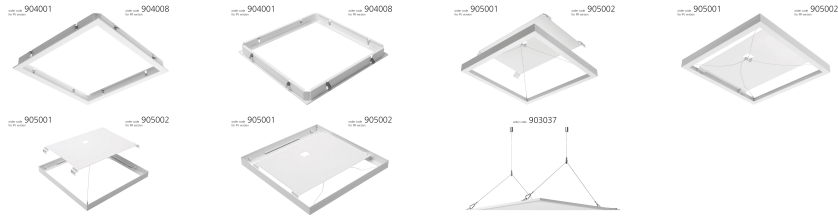

## LIDC



The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.