




PRODUCT DETAILS



Dimensions



Accessories



SANA II

SANA II PR1 LED 4100lm/840 1x35W, DALI, RAL 9016

DOWNLOADS

[Datasheet](#)

[Product sheet](#)

[Installation manual](#)

[IES file](#)

[LDT file](#)

[EEC](#)

Description

MOUNTING	Ceiling recessed PRx - T-ceiling
LIGHT SOURCE	LED
OPTICAL SYSTEM	Microprismatic diffuser (MCD)
BEAM ANGLE	85°, 90°
LIGHT DISTRIBUTION	Direct
WIRING	Electronic control gear DALI (EDA)
MATERIALS	Housing: aluminium Diffuser: PS
SURFACE FINISH	Housing: white RAL 9016
ACCESSORIES	Rope suspension Frame for plasterboard installation Frame for surfaced installation
VOLTAGE	220-240 V, 50-60 Hz
POWER FACTOR	0,96
NET LUMEN OUTPUT (Ta=25°C)	4100 lm
LUMINOUS FLUX TOLERANCE	+/- 10 %
POWER CONSUMPTION	35 W
SYSTEM EFFICACY	117 lm/W
CORRELATED COLOUR TEMPERATURE	4000 K
COLOUR RENDERING INDEX	>80 Ra
COLOUR TOLERANCE	3 SDCM
PROTECTION CLASS	II
SERVICE LIFETIME (Ta=25°C)	50,000 hours / L70 / B50
AMBIENT OPERATING TEMPERATURE	From -20 °C to +35 °C
IP PROTECTION DEGREE	IP20, optical part IP40
DIMENSIONS (L x W x H)	PR1: 620 x 620 x 10 mm
WEIGHT	5,7 kg


AREAS OF APPLICATION

EDUCATION


HOSPITALITY

HEALTH AND CARE

OFFICE

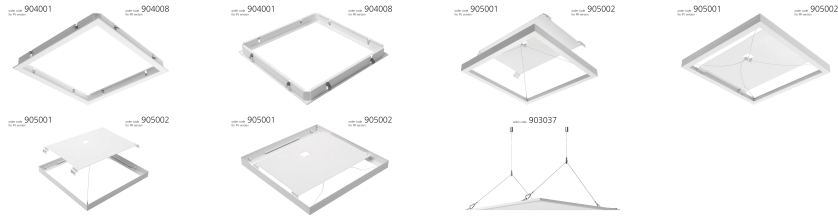

LIDC



The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.